
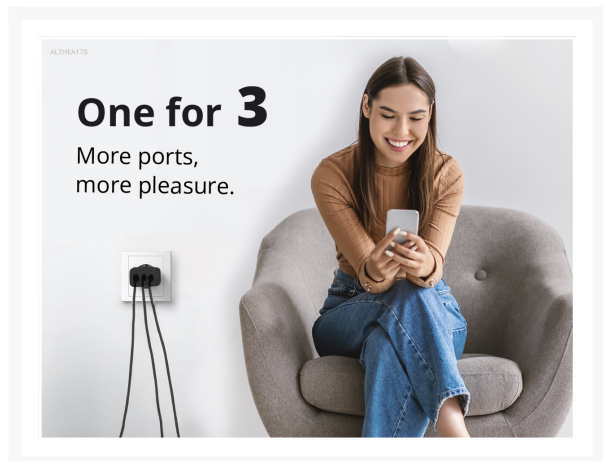



ALTHEA17B 3-Port 67W GaN USB-PD-Ladegerät mit USB-C-Ladekabel, USB-C x 2, USB-A x 1, QC 3.0, PPS

Product Images




ALTHEA17B

Premium GaN-Technologie

Your benefits:

- > GaN chargers are smaller
- > less heat during power transfer
- > more energy efficient

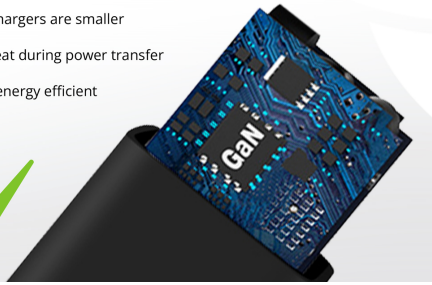

Power for 3-Port use

Conceptronic ALTHEA17B Charger charging instructions



ALTHEA17B

Universal compability

Laptop



MacBook Pro



MacBook Air



Dell XPS 13

Tablet



iPad Pro / Air / Mini



Galaxy Tab S8 / S7 / S7+

Smartphone



iPhone



HUAWAI Mate 60 Series



Galaxy



Google Pixel

And many more



AirPods / DJI / Canon / Gaming



Short Description

- USB-C 1 Ausgang: DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/3.0A, 15.0V/3.0A, 20.0V/3.35A (PD); 3.3-11.0V/4.05A (PPS)
- USB-C 2 Ausgang: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD); 3.3-11.0V/1.8A (PPS)
- USB-A-Ausgang: DC 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A (QC 3.0)
- USB-C 1 + USB-C 2 + USB-A Ausgang: 45.0W (USB-C 1) + 5.0V/3.0A (USB-C 2 + USB-A)
- USB-Power-Delivery- (PD) 3.0-Technologie mit Schnellladefunktion
- Entspricht dem Programmable Power Supply (PPS) Standard zur Verbesserung der Ladeeffizienz und Reduzierung der Hitzeentwicklung
- Schutz gegen Überlastung, Kurzschluss und Überhitzung

- Enthält ein 1,5 m langes 3,0A USB-C zu USB-C Kabel

Description

Das USB-PD-Ladegerät bietet eine sichere, zuverlässige und komfortable zweite Stromversorgungslösung für Heim und Büro sowie eine vielseitige Option auf Reisen. Das Gerät eignet sich zudem ideal als Ersatz für beschädigte oder verlorene Netzteile. Sie Erkennt automatisch die angeschlossenen Geräte und lädt diese mit bis zu 67W auf, wie z. B.: MacBook, Nintendo Switch, Samsung usw. Das Ladegerät ist geschützt gegen Überlastung, Kurzschlüsse und Überhitzung.

Additional Information

Number of outputs	3
USB Type-A ports quantity	1
Fast charging technology	Quick Charge 3.0, Power Delivery 3.0, Programmable Power Supply (PPS)
USB Type-C ports quantity	2
Programmable power supply (PPS) (YES/NO)	Ja
Material des Gehäuses	Polycarbonate (PC)
Number of simultaneously connected devices (max)	3
Port 1 Power Output	USB-C1 output: DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/3.0A, 15.0V/3.0A, 20.0V/3.35A (PD); 3.3-11.0V/4.05A (PPS)
Port 2 Power Output	USB-C2 output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD); 3.3-11.0V/1.8A (PPS)
Port 3 Power Output	USB-A output: DC 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A (QC 3.0)
Cables included	USB Type-C
Power Plug Type	EU
Länge des Kabels	150 centimeter
Tiefe des Pakets	36 millimeter
Höhe des Pakets	110 millimeter
Breite des Pakets	125 millimeter
Gewicht der Verpackung	29 gram
Code des Harmonisierten Systems (HS)	850440
Einhaltung der Nachhaltigkeit	Nein
Zulassungen und Konformität	CE, ERP, RoHS
Inhalt des Pakets	Quick installation guide, USB cable (C-C)
USB Power Delivery revision	3.0

Operating temperature (T-T) Max	35 celsius
Operating temperature (T-T) Min	0 celsius
Storage relative humidity (H-H) Max	90%
Storage relative humidity (H-H) Min	10%
Operating relative humidity (H-H) Max	80%
Operating relative humidity (H-H) Min	20%
Storage temperature (T-T) Max	80 celsius
Storage temperature (T-T) Min	-20 celsius
Farbe	Schwarz
EAN	4015867236512
Modellnummer	ALTHEA17B
Maximum AC Input	240 volt
Minimum AC Input	100 volt
Eingangsstrom	1.5 ampere
Maximum power	67 watt
Icecat_Power protection features	Over current, Over power, Short circuit
Produkt Höhe	32 millimeter
Produkt Breite	54 millimeter
Produkt Tiefe	54 millimeter
Produkt Gewicht	128 gram

